



# serie R

## Pompe per vuoto a palette Vane vacuum pumps

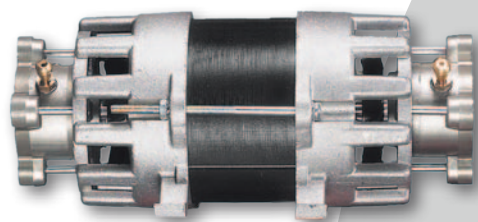

R15 D AC 02

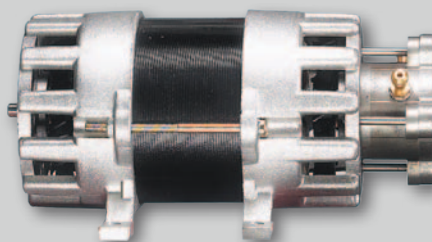

R19 S AC 02



R15 S DC 53



R19 S DC 54

Le pompe per vuoto rotative a palette possono essere fornite in versione con singolo o con doppio corpo pompa.

La versione con doppio corpo pompa consente l'utilizzo sia in parallelo che in serie. Le pompe della "Serie R" non necessitano di manutenzione.

Possono essere utilizzate per generare vuoto e in alcuni casi per comprimere aria.

Lo statore e i coperchi sono realizzati in materiale sinterizzato, il rotore in ottone e le palette in acciaio temprato.

Vengono fornite complete di motore alimentato in corrente alternata monofase oppure in corrente continua.

*Rotary vane vacuum pumps can be supplied either with single or double pump body.*

*The double body type allows the use both in parallel and in series. The "R Series" pumps are maintenance free.*

*They can be used for creating vacuum, but sometimes they can also compress air.*

*The body consisting of the stator and covers made by sintered material, brass rotor, and hardened-steel vanes.*

*Pumps are supplied duly fitted with AC single phase or DC motors.*

		R10 S DC 50	R15 S AC 01	R15 S DC 53	R15 D AC 02	R15 D DC 54	R19 S AC 02	R19 S DC 54	R19 D AC 06	R19 D DC 55
Portata nominale Nominal capacity	50 Hz	9,5	9,5	10,5	Parallel 19 Series 9,5	Parallel 20	12	12,5	Parallel 23 Series 12	Parallel 24
	60 Hz				Parallel 23 Series 11,5				Series 10	
Vuoto (Assoluto) Vacuum (Abs)	mbar	180	150	150	Parallel 150 Series 30	Parallel 150 Series 30	150	150	Parallel 150 Series 30	Parallel 150 Series 30
Tensione* Voltage*	volt	12/24/110/220 DC	110/230 AC	12/24/220 DC	110/230 AC	12/24 DC	110/230 AC	12/24/110 DC	110/230 AC	24 DC
Dimensioni Dimensions	mm	128x74x74	145x102x83	129x74x74	179x102x83	154x65x65	163x102x83	157x74x74	196x102x83	206x94x65
Peso Weight	kg	0,94	1,46	0,96	2,07	2,39	1,87	1,29	2,39	2,27

\* Su richiesta possiamo fornire motori con voltaggi diversi / Motors having different voltages could be supplied on demand